

HD720P & HD1080P CCTV SINGAPORE PACKAGES

AVTECH

AVTECH CCTV Singapore Package 1



\$680

- ✓ 1 x 4ch H264 HD DVR
- ✓ 1 x Day & Night 1080P HD IR Dome Camera
- ✓ 1 x 1TB HDD
- ✓ 1 X Standard Installation
- ✓ 1 Year On Site Warranty
- ✓ 1 Year onsite warranty against manufacturer defects
- ✓ Networking and 1 time coaching for use of system (To enable access over mobile phone)

AVTECH

AVTECH CCTV Singapore Package 2



\$880

- ✓ 1 x 4ch H264 HD DVR
- ✓ 2 x Day & Night 1080P HD IR Dome Camera
- ✓ 1 x 1TB HDD
- ✓ 1 X Standard Installation
- ✓ 1 Year On Site Warranty
- ✓ 1 Year onsite warranty against manufacturer defects
- ✓ Networking and 1 time coaching for use of system (To enable access over mobile phone)

AVTECH

AVTECH CCTV Singapore Package 3



\$1080

- ✓ 1 x 4ch H264 HD DVR
- ✓ 3 x Day & Night 1080P HD IR Dome Camera
- ✓ 1 x 1TB HDD
- ✓ 1 X Standard Installation
- ✓ 1 Year On Site Warranty
- ✓ 1 Year onsite warranty against manufacturer defects
- ✓ Networking and 1 time coaching for use of system (To enable access over mobile phone)

AVTECH

AVTECH CCTV Singapore Package 4



\$1280

- ✓ 1 x 4ch H264 HD DVR
- ✓ 4 x Day & Night 1080P HD IR Dome Camera
- ✓ 1 x 1TB HDD
- ✓ 1 X Standard Installation
- ✓ 1 Year On Site Warranty
- ✓ 1 Year onsite warranty against manufacturer defects
- ✓ Networking and 1 time coaching for use of system (To enable access over mobile phone)

SPECIFICATION CAMERA AVTECH-DS-2CE56DOT-IRF-HIK

HIKVISION

DS-2CE56DOT-IRF HD1080p IR Turret Camera



Key Features

- 2 megapixel high performance CMOS
- Analog HD output, up to 1080p resolution
- Day/Night switch
- Smart IR
- Up to 20 m IR distance
- Switchable TVI/AHD/CVI/CVBS
- IP66


Specifications

Camera	
Image Sensor	2MP CMOS image sensor
Signal System	PAL/NTSC
Effective Pixels	1920 (H) × 1080 (V)
Min. illumination	0.01 Lux@(F1.2,AGC ON),0 Lux with IR
Shutter Time	1/25 (1/30) s to 1/50,000 s
Lens	2.8 mm, 3.6 mm, 6 mm optional
	Field of view: 103° (2.8 mm), 82.2° (3.6 mm), 54° (6 mm)
Lens Mount	M12
Day & Night	ICR
Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 75°, Rotation: 0° to 360°
Synchronization	Internal synchronization
Video Frame Rate	1080p@25fps/1080p@30fps
HD Video Output	1 analog HD output
S/N Ratio	>62 dB
General	
Operating Conditions	-40 °C to 60 °C (-40 °F to 140 °F), Humidity: 90% or less (non-condensation)
Power Supply	12 V DC ± 15%
Power Consumption	Max. 4 W
Protection Level	IP66
IR Range	Up to 20 m
Dimension	Φ 89.9 × 70.1 mm (3.54" × 2.76")
Weight	280 g (0.62 lb.)

Order Model

DS-2CE56D0T-IRF

Dimensions

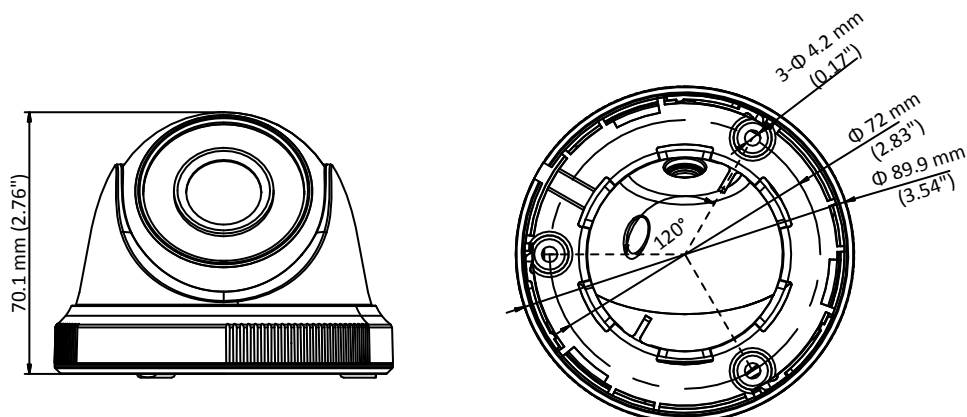

Accessories



DS-1272ZJ-110-TRS
Wall Mounting Bracket



DS-1275ZJ
Vertical Pole Mounting Bracket



DS-1276ZJ
Corner Mounting Bracket



DS-1H18
Video Balun



X41T
Camera Tester



DS-1280ZJ-XS
Junction Box

Distributed by



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision UK
T +44-1628-9021-4
support.uk@hikvision.com

Hikvision Europe
T +31-23-5542770
saleseuro@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision France
T +33(0)1-85-330-444
info.fr@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Hong Kong
T +852-2151-1761

SPECIFICATION DIGITAL VIDEO RECORDER AVTECH DGD1304

DGD1304



TRIBRID 4CH HD CCTV DVR

FEATURES

Free P2P Cloud EaZy Networking*

- ❖ Cloud EaZy Networking available to connect this device to Internet automatically in three steps with our free mobile app, EagleEyes.
- ❖ The “Buddy” feature to share the device access permission to other people.
- ❖ Device login / out notifications reported.




Remote Surveillance

- ❖ Fully compatible with iOS and Android devices, and Internet Explorer on Windows operating system
- ❖ CMS Lite for 32 devices central management
- ❖ Applicable also to Apple's media player, QuickTime.

Tribrid Video Input

- ❖ Supports Analog HD / TVI / 960H video input.
- ❖ All channels at 1080P real-time recording

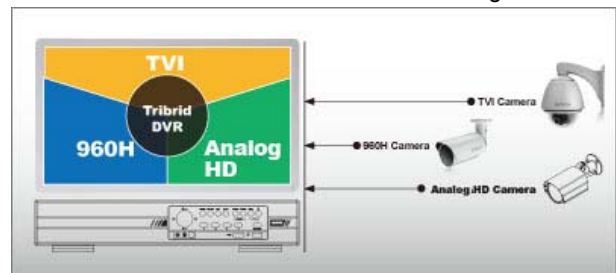


Push Status -

Active Event Notification with EagleEyes App

- ❖ Push Status to send instant notifications for system events, such as video loss or HDD data removal.



REAR PANEL

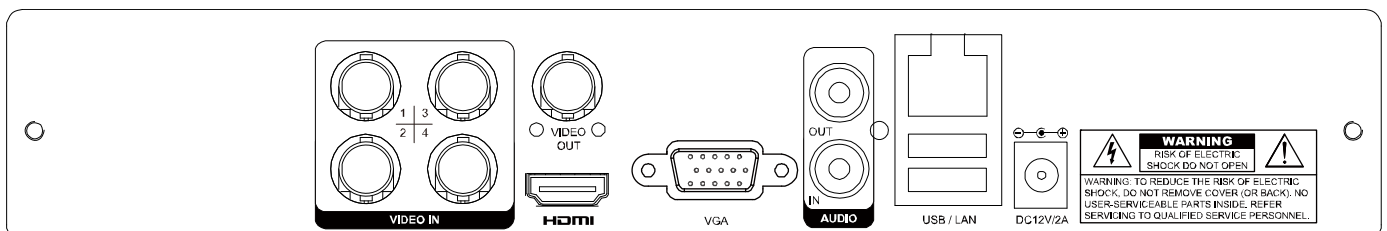

SPECIFICATION DIGITAL VIDEO RECORDER AVTECH DGD1304

SPECIFICATIONS

▼ Video

Video System		NTSC / PAL (auto detection)
Video Compression Format		H.264
Video Signal		Analog HD / TVI / 960H
Video Input		4 channels (Composite video signal 1 Vp-p 75 BNC)
Video Output	BNC	YES (Main Monitor / Call Monitor selectable)
	VGA	YES
	HDMI	YES
Video Resolution		1080P / 720P / QHD / 960H / Frame / Field / CIF

▼ Record & Backup

Max. Recording Rate		1920 x 1080 @ 60 IPS <NTSC> / 50 IPS <PAL> 1280 x 720 @ 120 IPS <NTSC> / 100 IPS <PAL>
Recording Mode		Manual / Timer / Motion / Remote
Pre-alarm Recording		YES
Playback Channel		4CH
Quick Search		Time / Motion search mode
Backup Device		USB 2.0 drive / Network
Regular Backup		YES

▼ Audio

Audio Input		1 audio input
Audio Output		1 audio output (Mono)

▼ General

Hard Disk Storage		6TB SATA HDD x 1
SATA Interface		YES
Image Quality Setting		SUPER BEST / BEST / HIGH / NORMAL
USB Mouse Control		YES
Motion Detection Area		16 × 12 grids per channel
Motion Detection Sensitivity		3 adjustable parameters for accurate detection
Event Notification		Push Status / FTP / E-Mail
Picture Zoom		2X digital zoom
IR Remote Control		YES (IR receiver built-in)
Key Lock (Password Protection)		YES
User Level		4 user levels for different access privilege
Video Loss Detection		YES
Camera Title		Supports up to 25 letters
Video Adjustable		Hue / Saturation / Contrast / Brightness
Date Display Format		YY/MM/DD, DD/MM/YY & MM/DD/YY
Daylight Saving		YES
Power Source (±10%)		DC12V / 2A
Operating Temperature		10°C ~ 40°C (50°F ~104°F)
Operating Humidity		10% ~ 85%
Dimensions (±10%)**		260(L) x 48(H) x 235.7(D)
Net Weight (kg)		2.2

SPECIFICATION DIGITAL VIDEO RECORDER AVTECH DGD1304

SPECIFICATIONS

▼ Network		
Ethernet	10/100 Base-T. Supports remote control and live view via Ethernet	
Network Protocol	TCP/IP, PPPOE, DHCP and DDNS	
▼ Remote Surveillance from PC		
Compatible Operating System	Windows & MAC	
Compatible Program	Web Browser:	Internet Explorer, Google Chrome & Safari
	CMS Lite:	32CH central management software for Windows OS
	QuickTime:	For both Windows and MAC operating systems
Max. online users	20	
Web Transmitting Compression Format	H.264	
Network Live Audio	YES	
Remote Independent Operation	YES	
Remote Event Download & Playback	YES	
▼ Mobile Surveillance		
App	EagleEyes	
Compatible Devices	iOS & Android devices	
Push Status	YES	
▼ Others		
EaZy Networking	YES	
DCCS Support	YES	
AVTECH Free DDNS service	YES	
Privacy Mask	YES	
Multiplex Operation	Live display / record / playback / backup / network operations	
System Recovery	System auto recovery after power failure	
Optional Peripherals	HDMI Matrix (HDM02) / USB Joystick (AVX102)	

* The specifications are subject to change without notice.

** Dimensional tolerance: ±5mm